polarvista



























TABLE OF CONTENTS

| COMPANY PROFILE | PAGE 01 |
|---------------------------------|---------|
| LEED CONSULTANCY | PAGE 02 |
| LED T8 TUBE LIGHT | PAGE 03 |
| LED T8 LOUVER SHADE | PAGE 04 |
| LED T5 TUBE LIGHT | PAGE 05 |
| LED SPOT LIGHT | PAGE 06 |
| LED CONCEALED PANEL LIGHT | PAGE 07 |
| LED SURFACE PANEL LIGHT | PAGE 08 |
| LED TRACK LIGHT | PAGE 09 |
| LED WALL LAMP | PAGE 10 |
| LED STREET LIGHT | PAGE 11 |
| SOLAR STREET LIGHT | PAGE 12 |
| LED FLOOD LIGHT | PAGE 13 |
| LED HIGHBAY LIGHT | PAGE 14 |
| LED GARDEN LIGHT | PAGE 15 |
| TECHNICAL SCHOOL PROJECT LIGHT | PAGE 16 |
| LED OTHERS LIGHT | PAGE 17 |
| BUSBAR TRUNKING SYSTEM - PART A | PAGE 18 |



TABLE OF CONTENTS

| BUSBAR TRUNKING SYSTEM-PART B | PAGE 19 |
|---|---------|
| PRO-D DATA CENTER BUSWAY | PAGE 20 |
| TROLLY BUSBAR | PAGE 21 |
| SUBSTATION SYSTEM | PAGE 22 |
| POWER PROTECTION EQUIPMENT | PAGE 23 |
| V90 SWITCH SOCKET SERIES | PAGE 24 |
| V50 SWITCH SOCKET SERIES | PAGE 25 |
| V30 SWITCH SOCKET SERIES | PAGE 26 |
| SECURITY SYSTEM | PAGE 27 |
| BIOMETRIC PRODUCT + ACCESS CONTROL SYSTEM | PAGE 28 |
| OFFICE FURNITURE | PAGE 29 |
| SOLAR PANEL SYSTEM | PAGE 30 |
| PRODUCTION FURNITURE | PAGE 31 |
| ONE-STOP RACKING SYSTEM | PAGE 32 |
| AUXILIARY PRODUCTS | PAGE 33 |
| PROJECT DONE BY POLARVISTA | PAGE 34 |
| CLIENT LIST-01 | PAGE 35 |
| CLIENT LIST-02 | PAGE 36 |



LAUNCH

2005

Was started in Hong Kong, and expanded in Bangladesh, China, Taiwan and Turkey. Also have local sister concern "Leed International".

BUSINESS ERA

From **2005**

We have started in a full range of Textile Solution support our client to set up textile composite factory. Complete project case: Chaity composite Group in Sonargaon. And Eusebio Sport Ltd. relocated factory from China to Bangladesh full factory set up in KEPZ Including planning, design, construction and commissioning (CSA & MEP).

OUR SPECIALITY


2005 To 2018

POLARVISTA works 'Turnkey' basis projects. We are specialized in providing Energy Solution Systems, Lighting Solution, Automation and Digital System. Our Green LEED Solution for USGBC LEED certification support our client to pursuit Greener Smarter.

RECENT ADDITION

From 2019 To NEXT

We are serving the entire Bangladesh with a wide range of service and solutions for the past 14 Years. Now we are participating on both industrial/private & govt. projects all over Bangladesh.

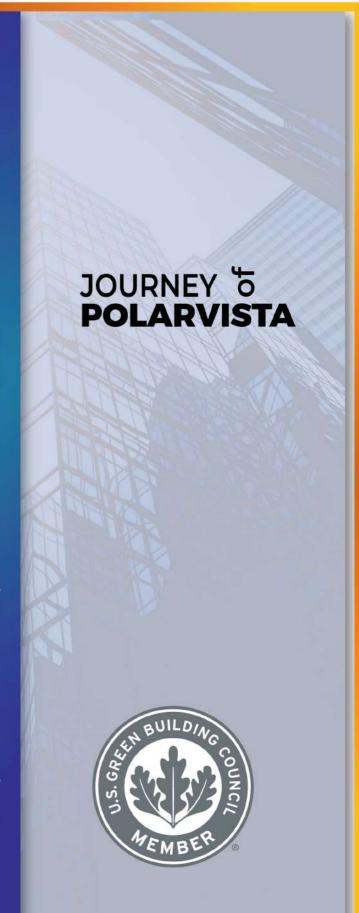

Polar Vista International Co., Ltd. is a pioneer LEED Green Building Consultancy company in Bangladesh with Silver Membership of US Green Building Council.

We have direct access to all resources and tolls available at USGBC. Currently we are consultanting Five (05) projects from which one is already LEED Gold Certified with 75 points.

Mr. Haw Chu Shiau is a LEED AP of BD+C (Building Design & Construction) and leader of a professional team to serve you better for your Green Building Certifications.







Mr. Haw Chu Shiau (Building Design & Construction)

CREDENTIAL NO.: 10829880-AP-BD+C



LEED (Leadershipn in Energy & Environmental Design) is an internationally recognized green building certification system. It provides third party verification that this building was designed and built in an environemntally sustainable way achieving a high level of LEED certification.

Certification level are basic Silver, Gold, Platinum.

LEED measures energy savings, water efficiency, carbon emissions reductions, improved indoor air quality and stewardship of resources.

Developed by the U.S. Green Building Council (USGBC), LEED provides building owners and operators a concise framework for identifying and implementing practical and measurable green building design, construction, operations and maintenance solutions.



We are committed to environmental awarness and we strive to do our part







LED T8 TUBE LIGHT















LED T8 Tube Light 2 Feet



| TECHNICAL SPECIFICATION | |
|-----------------------------|--------------|
| Power 9/10/15/18/20/22/24 W | |
| Input Power | AC110 - 220V |
| Lumen | 110 Lm/w |
| Color Temperature | 2700 - 6500 |
| CRI | 80 |
| Power Factor | 0.93 - upto |





LED T8 Tube Light 4 Feet



| TECHNICAL SPECIFICATION | | |
|-------------------------|--------------|--|
| Power | 20/22/24 W | |
| Input Power | AC110 - 220V | |
| Lumen | 110 Lm/w | |
| Color Temperature | 2700 - 6500 | |
| CRI | 80 | |
| Power Factor | 0.93 - upto | |









LED T8 LOUVER SHADE


















LED T8 Louver Shade




| TECHNICAL SPECIFICATION | |
|-------------------------|-----------------------|
| Power | 9/10/15/18/20/36/48 W |
| Input Power | AC85- 265V |
| Lumen | 110 Lm/w |
| Color Temperature | 3000 - 6500 |
| CRI | 80 |
| Power Factor | 0.93 - upto |




Model No.: PV-LT8Louver-1



Model No.: PV-LT8Louver-2



Model No.: PV-LT8Louver-3



Model No.: PV-LT8Louver-4



Model No.: PV-LT8Louver-5



Model No.: PV-LT8Louver-6



Model No.: PV-LT8Louver-7



Model No.: PV-LT8Louver-8



Model No.: PV-LT8Louver-9





LED T5 TUBE LIGHT
















LED T5 Tube Light



| TECHNICAL SPECIFICATION | |
|-------------------------|-----------------------|
| Power | 9/10/15/18/20/22/24 W |
| Input Power | AC110 - 220V |
| Lumen | 110 Lm/w |
| Color Temperature | 2700 - 6500 |
| CRI | 80 |
| Power Factor | 0.93 - upto |

LED T5 Tube Light 1 Feet

LED T5 Tube Light 2 Feet

LED T5 Tube Light 4 Feet








LED T5 Tube Light Shade





Model No.: PV-LT5T-5





Model No.: PV-LT5T-6 Model No.: PV-LT5T-7





LED SPOT LIGHT















LED Spot Light Series



| TECHNICAL SPECIFICATION | |
|--------------------------------|-------------|
| Power 3/5/6/10/12/15/18/20/25/ | |
| Input Power | AC85- 265V |
| Lumen | 110 Lm/w |
| Color Temperature | 2700 - 6500 |
| CRI | 80 |
| Power Factor | 0.93 - upto |



Model No.: PV-LSPOT-1



Model No.: PV-LSPOT-2



Model No.: PV-LSPOT-3



Model No.: PV-LSPOT-4



Model No.: PV-LSPOT-5



Model No.: PV-LSPOT-6



Model No.: PV-LSPOT-7



Model No.: PV-LSPOT-8



Model No.: PV-LSPOT-9



Model No.: PV-LSPOT-10



Model No.: PV-LSPOT-11



Model No.: PV-LSPOT-12





LED CONCEALED PANEL LIGHT

















LED Concealed Panel Light Series



| TECHNICAL SPECIFICATION | |
|--------------------------------|-------------|
| Power 3/5/6/12/15/20/24/30/40/ | |
| Input Power | AC85- 265V |
| Lumen | 110 Lm/w |
| Color Temperature | 2700 - 6500 |
| CRI | 80 |
| Power Factor | 0.93 - upto |







LED SURFACE PANEL LIGHT















LED Surface Panel Light Series



| TECHNICAL SPECIFICATION | |
|--------------------------------|-------------|
| Power 3//6/12/20/30/40/44/72 W | |
| Input Power | AC85- 265V |
| Lumen | 110 Lm/w |
| Color Temperature | 2700 - 6500 |
| CRI | 80 |
| Power Factor | 0.93 - upto |









LED TRACK LIGHT

















LED Track Light Series



| TECHNICAL SPECIFICATION | |
|-------------------------|-----------------------|
| Power | 6/10/12/15/20/30/40 W |
| Input Power | AC85- 265V |
| Lumen | 110 Lm/w |
| Color Temperature | 2700 - 6500 |
| CRI | 80 |
| Power Factor | 0.93 - upto |



Model No.: PV-LTRACK-1



Model No.: PV-LTRACK-2



Model No.: PV-LTRACK-3



Model No.: PV-LTRACK-4



Model No.: PV-LTRACK-5



Model No.: PV-LTRACK-6



Model No.: PV-LTRACK-7



Model No.: PV-LTRACK-8



Model No.: PV-LTRACK-9



Model No.: PV-LTRACK-10



Model No.: PV-LTRACK-11



Model No.: PV-LTRACK-12








LED Wall Lamp Series



| TECHNICAL SPECIFICATION | |
|-------------------------|-------------|
| Power 5/10/15/20/30 W | |
| Input Power | AC85- 265V |
| Lumen | 110 Lm/w |
| Color Temperature | 2700 - 6500 |
| CRI | 80 |
| Power Factor | 0.93 - upto |

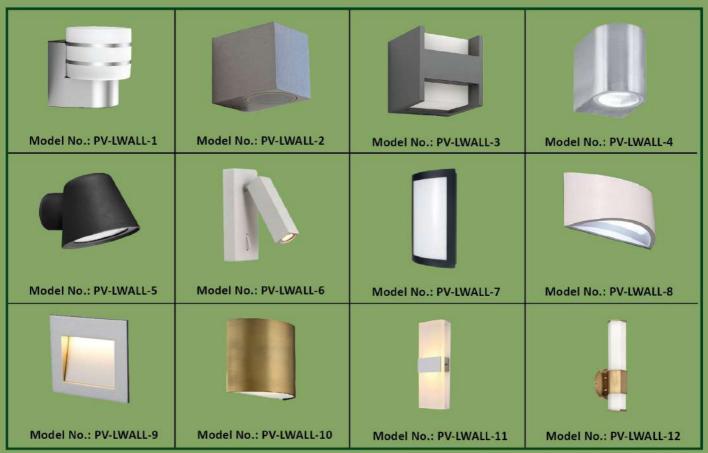





LED STREET LIGHT















LED Street Light Series



| TECHNICAL SPECIFICATION | |
|-------------------------|-------------|
| Power 50/100/150/200 W | |
| Input Power | AC85- 265V |
| Lumen | 110 Lm/w |
| Color Temperature | 6500 - 7000 |
| CRI | 80 |
| Power Factor | 0.93 - upto |







LED SOLAR STREET LIGHT















LED Solar Street Light Series



| TECHNICAL SPECIFICATION | |
|-------------------------|---------------------------|
| Power | 20/30/60/70/100/150/200 W |
| Input Power | AC85- 265V |
| Lumen | 110 Lm/w |
| Color Temperature | 2700 - 6500 |
| CRI | 80 |
| Power Factor | 0.93 - upto |



Model No.: PV-LSSTL-9







Model No.: PV-LSSTL-4



Model No.: PV-LSSTL-10






Model No.: PV-LSSTL-7



Model No.: PV-LSSTL-8








Model No.: PV-LSSTL-11

Model No.: PV-LSSTL-12



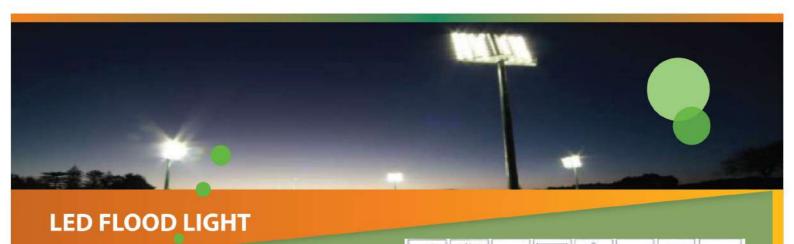

LED Flood Light Series



| TECHNICAL SPECIFICATION | |
|-------------------------|-----------------------------|
| Power | 30/50/100/150/200/300/400 W |
| Input Power | AC85- 265V |
| Lumen | 110 Lm/w |
| Color Temperature | 2700 - 6500 |
| CRI | 80 |
| Power Factor | 0.93 - upto |

IP65 F (III) CE (III) RoHS







LED HIGHBAY LIGHT















LED Highbay Light Series



| TECHNICAL SPECIFICATION | |
|-------------------------|----------------------------|
| Power | 30/50/70/100/120/150/200 W |
| Input Power | AC85- 265V |
| Lumen | 110 Lm/w |
| Color Temperature | 2700 - 6500 |
| CRI | 80 |
| Power Factor | 0.93 - upto |









Model No.: PV-LHBL-2

Model No.: PV-LHBL-3

Model No.: PV-LHBL-4









Model No.: PV-LHBL-5

Model No.: PV-LHBL-6

Model No.: PV-LHBL-7

Model No.: PV-LHBL-8









Model No.: PV-LHBL-9 Model No.: PV-LHBL-10

Model No.: PV-LHBL-11

Model No.: PV-LHBL-12





LED GARDEN LIGHT















LED Garden Light Series



| TECHNICAL SPECIFICATION | |
|-------------------------|------------------------|
| Power | 10/15/20/25/30/40/50 W |
| Input Power | AC85- 265V |
| Lumen | 110 Lm/w |
| Color Temperature | 2700 - 6500 |
| CRI | 80 |
| Power Factor | 0.93 - upto |



Model No.: PV-LGARL-1



Model No.: PV-LGARL-2



Model No.: PV-LGARL-3



Model No.: PV-LGARL-4



Model No.: PV-LGARL-5



Model No.: PV-LGARL-6



Model No.: PV-LGARL-7




Model No.: PV-LGARL-8



Model No.: PV-LGARL-9



Model No.: PV-LGARL-10



Model No.: PV-LGARL-11



Model No.: PV-LGARL-12



TECHNICAL SCHOOL LIGHTING











LED OTHERS LIGHT

















LED Bulb



| TECHNICAL SPECIFICATION | |
|-------------------------|-----------------------|
| Power | 9/10/12/15/20/25/30 W |
| Input Power | AC110 - 220V |
| Lumen | 110 Lm/w |
| Color Temperature | 2700 - 6500 |
| CRI | 80 |
| Power Factor | 0.93 - upto |

LED Strip Light



| TECHNICAL SPECIFICATION | | |
|-------------------------|--------------|--|
| Power | 4/10/15 W | |
| Input Power | AC110 - 220V | |
| Lumen | 110 Lm/w | |
| Color Temperature | 2700 - 6500 | |
| CRI | 80 | |
| Power Factor | 0.93 - upto | |

LED Emergency Exit Light



| TECHNICAL SPECIFICATION | | |
|-------------------------|---------------|--|
| Power | 3/5/6/10/12 W | |
| Input Power | AC110 - 220V | |
| Lumen | 110 Lm/w | |
| Color Temperature | 2700 - 6500 | |
| CRI | 80 | |
| Power Factor | 0.93 - upto | |





Polarvista is dedicated supplier of electric product for over 10 years. It has done so many projects in Bangladesh, with four key business: High and low voltage busway, Switchboard & Intelligent components, Copper and aluminium material & Tin coated copper strip, Cable tray support & Hanger.



Low Voltage Busway



LV Series Compact Busway



LM Series Compact Busway



Pro-D Data Center Busway



MM Powerplus Busway



LB Lighting Busway



High Voltage Busway



GFM series common box enclosed busway



Q (B) JGM series insulation tube busway



QLFM series isolated phase busway



GIL six sulfur fluoride gas insulated enclosed bus



14001

OHSA 18001 8

SA 8000



/T GB/T 22 29490























BUSBAR TRUNKING SYSTEM



Cast Resin Busway



GM-D series low voltage resin busway



GM-Z series medium voltage resin busway



GM-N series refractory busway



Wind Power Busway



WLG series composite insulation wind power tube busway



WLK series wind power busway



Cable Tray



Net Cable Tray



Fiber Channel



Cabling Rack



General cable tray



OHSA 18001

8000

27922

























PRO-D DATA CENTER BUSWAY



Overview:

As a high efficient intelligent power distribution system Pro-D Data Center Busway can be applied specically in data center and critical power supply. The design with low magnetic aluminum alloy housing minimizes the weight of the busbar, and greatly reduce the influence of eddy current and hysteresis loss on other electrical and electronic devices. Pro-D Data Center Busway has multiple power quality monitoring function, e/g/ monitor the busway temperature rise, standard communication data interface for real-time collection, statistics and upload operation data. It can provide users with the function of whole life cycle monitoring and mainten a n C e

Features:

- . Efficient & flexible, unmatchable flexibility, scalability fast connection, ease of installation & maintenance, space saving.
- . Modularity, interchangeable, varying power densities can be fit in the same busduct infrastructure
- . Reliable & safe, low resistance, EMI & EMS compliance, automatic disconnection & interlock mechan
- . Smart & intelligent, multi-function monitoring including power quality, 7 standard communication data interface, remote control function.







POLARVISTA has a professional "Workshop assignment from the layout process design and other electrical fixtures, and a qualified professional electrical installation and commisioning". The team for your modern workshop from visual effects, practical effects to green energy have reached a new height. Lighthouse electrical installation safety, energy conservation, aesthetics, is Polarvista people on their own requirements.





Widely used in garment industry and concentrated power supply





Polarvista is the Authorized Distributor and Supplier of WETOWN Distribution Panel Systems. WETOWN Distribution Panels produced in compliance with the international standards.

PROPERTIES

Standard: IEC/BS EN 60439-3

Voltage: 230/240V Current: 32/63A

Insulation Voltage: 500V AC Short Circuit Withstand: 16 KA Protection Degree: IP 4X

Color: RAL 7035





GFP SERIES DISTRIBUTION PANEL

GFP series 32-63A Feeder Pillar Panel Systems can be used for decorative and functional purposes with its ergonomic structure.



GDB series 32-800A Distribution Panel Systems can be used for providing power in various facilities such as factories, hospitals, buildings and sky-scrapers.





GSP SERIES DISTRIBUTION PANEL

GSP series 800-5000A Panel Systems can be used in power distribution with its modular structure and short-time withstand capacity up to 150kA.



All the insulating materials are made of halogen-free, non-flammable and fire-retardant (V0) materials.



POWER PROTECTION EQUIPMENT





SWITCH SOCKET EQUIPMENT

















LIGHTING ARRESTER EQUIPMENT













V90 SERIES SWITCH & SOCKET

V90 SWITCH



PVV90-01
One Gang One Way /
One Gang Two Way



PVV90-05



PVV90-02 Two Gang One Way




PVV90-06 Bellpush Switch



PVV90-03 Three Gang One Way



PVV90-07 DP Switch



PVV90-04 Four Gang One Way

V90 SOCKET



PVV90-09
3 Pin Multifunctional
Socket



PVV90-13
6 Pin Multifunctional
Socket With Switch



PVV90-17 Computer Socket



PVV90-103 Pin Multifunctional
Socket With Switch



PVV90-14 3 Pin Round Socket



PVV90-18

TV-Telephone Socke



PVV90-115 Pin Multifunctional
Socket



PVV90-15 TV Socket



PVV90-19
TV-Computer Socket



PVV90-12
5 Pin Multifunctional
Socket With Switch



PVV90-16 Telephone Socket



PVV90-20 Telephone-Computer Socket



V50 SERIES SWITCH & SOCKET

V50 SWITCH



PVV50-01One Gang One Way /
One Gang Two Way



PVV50-05 Fan Regulator



PVV50-02 Two Gang One Way



PVV50-06 Bellpush Switch



PVV50-03
Three Gang One Way



PVV50-07 DP Switch



PVV50-04
Four Gang One Way



PVV50-08
6 Pin Multifunctional
Socket With Switch

V50 SOCKET



PVV50-09
3 Pin Multifunctional



PVV50-13
5 Pin Multifunctional
Socket With USB



PVV50-17

TV-Telephone Socket



PVV50-10
3 Pin Multifunctional
Socket With Switch



PVV50-14 TV Socket



PVV50-18
TV-Computer Socket



PVV50-115 Pin Multifunctional
Socket



PVV50-15 Telephone Socket



PVV50-19
Telephone-Computer Socke



PVV50-125 Pin Multifunctional
Socket With Switch



PVV50-16 Computer Socket



PVV50-20 5 Hole Floor Socket



V30 SERIES SWITCH & SOCKET

V30 SWITCH



PVV30-01One Gang One Way /
One Gang Two Way



PVV30-05 Fan Regulator



PVV30-02 Two Gang One Way



PVV30-06 Bellpush Switch



PVV30-03 Three Gang One Way



PVV30-06 DP Switch



PVV30-04 Four Gang One Way

V30 SOCKET



PVV30-07
3 Pin Multifunctional
Socket



PVV30-11
5 Pin Multifunctional
Socket With USB



PVV30-15
TV-Telephone Socket



PVV30-08
3 Pin Multifunctional
Socket With Switch



PVV30-12 TV Socket



PVV30-16
TV-Computer Socket



PVV30-09
5 Pin Multifunctional
Socket



PVV30-13 Telephone Socke



PVV30-17
Telephone-Computer Sock



PVV30-10
5 Pin Multifunctional
Socket With USB



PVV30-14 Computer Socket



hot-swap SATA HDDs

* CE, FCC, LVD compliant

* Support up to 64 channels

GeoUision SECURITY SYSTEMS

* Max. 400 W power consumption

* Web-based Configuration and

Management

DOME CAMERAS BULLET CAMERAS IP Speed CAMERAS * Progressive scan CMOS sensor * Progressive scan CMOS sensor * Progressive scan CMOS sensor * 2/4/5/8MP, WDR * 2/4/5/8MP, WDR * 22x 2MP, 33x 5MP, camera * H.265, H.264 and MJPEG, 2x Zoom * H.265, H.264 and MJPEG, 2x Zoom * H.265, H.264 and MJPEG, 2x Zoom * IR LEDs for day-night surveillance * Outdoor network PTZ camera * IR Vandal Proof IP Dome * Built-in micro SD card slot * Built-in micro SD card slot * Built-in micro SD card slot * 3D noise reduction * Auto focus, 3D noise reduction * Smart streaming VMS SYSTEM **NVR SYSTEM POE SWITCH** * 6/8/16/24-Port 10/100BaseTX, PoE+ * Intel Core i7 Processor * Intel Core i5 Processor * 64-bit Windows Embedded OS * 64-bit Windows 10 IoT Enterprise plus 2-Port Gigabit Copper * IEEE 802.3at Compliant * 4U (20-bay) or 3U (16 / 8-bay) * 4U (20-bay) or 3U (16 / 8-bay)

Faster check-in, better greeting, more security. Live Streaming. AI Optimized, unleash the power of video intelligent. Enjoy hassle-free parking management. H.265 Standalone NVR, 16ch POE Network Video Recorder.

hot-swap SATA HDDs

* Support 32-channel GV-NVR * CE, FCC, LVD compliant



BIOMETRIC PRODUCTS

ACCESS CONTROL SYSTEMS



PBX SYSTEM



OFFICE FURNITURE

We offer the best quality of office furniture available in today's market. From contemporary to traditional, functional to luxurious, we've got the answer to all your furnishing needs, no matter what your budget will allow.



RECEPTION SOLUTION



MANAGEMENT DESK



BOARDROOM SOLUTION



WORKSTATION



CABINET SOLUTION





SEATING ARRANGEMENT



OFFICE CHAIR





SOLAR PANLES are photovolatic power sources capable of recharging batteries. The minimum battery size and solar panel output required depends on:

- * The average current drain of the system
- * Maximum time the battery must supply power to the system without being charged
- * The average current drain of the system the location of the site.

HIGH QUALITY SOLAR MODULE

MONOCRYSTALLINE SILICON SOLAR MODULE | POLYCRYSTALLINE SILICON SOLAR MODULE

- High efficience solar cells ensures high performance of solar module and create more power in peak hours.
- 3.2mm high transmissive Low Iron tempered glass, EVA laminate and water-proof TPT yield long life modules while enhancing cell performance.
- Bypass diodes to avoid hot-spot effect.
- Pre-cable with fast-connecting systems for convenient installation.
- Stable, heavy duty anodized aluminum frames with convenient mountingaccess, for high wind-pressure.
- 25-year Limited Power Warranty.
- Polarvista Photovolatic (PV) modules offer industry leading high performance and are designed specifically to meet our clients demands for residential, commercial and industrial use from installation to multimegawatt power plants.

Warranty And Certifications:

- * 5 Years workmanship, 10% 90%, 25 years 80% power warranty
- * ETL UL-1703 ISO 9000:2000
- * CE TUV IEC61215 IEC61730







Technical Specification:

| Charactesristics | Details |
|------------------------------|--|
| Solar Cell Size | 156mm X 156mm (6.14" X 6.14") |
| Module Dimension (L x W x T) | 1968 X 1000 X 50mm |
| Front Glass | 4.0mm Tempered |
| Junction Box | IP65 Rated |
| Output Cables | 1000mm length cable/compliable with MC IV connectors |
| Frame | Anodized aluminium |
| Weight | 24Kg |
| Operating Temperature | -40~+85°C |



PRODUCTION FURNITURE



Crop scrap car



Four-sided steel plate type car



Five sided van



Fabric multipurpose



Three side tube five van



Vertical tubular logistics car



Double logistics car



Double-coated tablets pulley car



Pulley single "U" shaped coated tablets car



Pulley double Z-type Pulley piece garment rack garment piece car (including hanging bars)



Stool with drawer



With drawers bench



"Y" type double rod racks car



Double stainless steel tube Sewing table with holder adjustable style hangers



and flight tool bag



Inspection table with light



Double-sided line inspection station



Scrap frame with trimming station



Bagging rack mount



Multipurpose



3-sets of models with wrapping station accessories pack frame



Flatbed trailer (tread plate)



Pastic basket with a handle



Single truck basket



Double truck basket stars






Pulley wire rack Flat water proof board



ONE-STOP RACKING SOLUTION



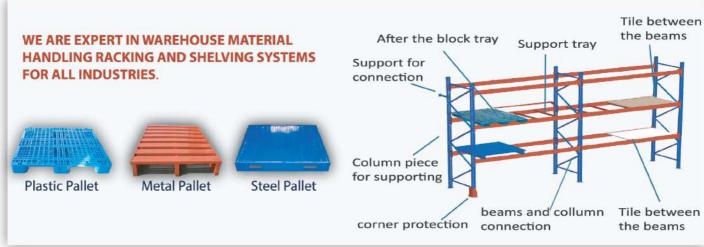





AUXILIARY PRODUCTS





PROJECT DONE BY POLARVISTA



























APPRECIATIONS & COMMITMENTS



Armed Forces Division



Bangladesh Army



Bangladesh Navy



Bangladesh Water Development Board



Bangladesh Postal Head Quarter



BEPZA



Election Commission Bangladesh



Kidney Foundation



Mongla Port Authority



OMC Health Care



Rajuk Uttara Apartment Projects



Technical Education Board



Ananta Group



Ananta Huaxing Ltd.



ADI TOWELS LTD.





CHARUTA

Appex Footwear Ltd. Alltex Industries Ltd.



Barnali Textile & Printing Industries (Pvt.) Ltd.



Bitopi Group



Badsha Textiles Ltd.



Bureau Veritas BD (Pvt.) Ltd.



Chaity Composite Ltd. Charuta Private Ltd.



Classic Group



Crystal Group



Denim Expert Ltd.



Doreen Suits Ltd.



Debonair Group





Esquire Group



ESPRIT







Fakir Group




<u>fashion</u>



Fakir Fashion Ltd.

Four H Group





Floret (Pvt) Ltd



G.N. Cotton Spinning Mills Ltd



GIVENSEE Group of Industries Ltd



Hydroxide Knitwear Ltd



IDS Group

35



WHO MAKE US PROUD













IBM Thakral Information Interlink Apparels Systems Pvt Ltd

Ltd

Impressive Group

Kadena Sportswear Ltd

Kabab Factory

Khaja Group









Lintas Bangladesh Co., Ltd.

M&J Group

Mim Design

Mesh Group

Masco Group

Metro Group













Palaml Group

Padma polyCotton Knit Fabric's Ltd

Pioneer Sweaters Ltd

Purbani Group

Passion Jeans Ltd.

Pinaki Group







Papyrus FastQ (BD) Ltd



Reza Group



Radiance Group



Robintex Group



Shovon Group



Shore To Shore Textiles



Shin Shin Group



Salim & Brothers Ltd



Sterling Group



Super Knitting & Dyeing Mills Ltd



Simba Fashions Ltd



SS Mart



SQ Group



Thermax Group



TEB Fashion International Ltd



Tamishna Group









Sheikh Rasel Gastro Liver Hospital





POLAR VISTA INTERNATIONAL CO., LTD.

LEED INTERNATIONAL (Sister Concern of Polarvista)

BANGLADESH ADDRESS

House# 09, Road# 04, 1st Floor, Nikunja# 02, Khilkhet# 1229, Dhaka, Bangladesh. Tel: +880 1674737042, Email: info.polarvista@gmail.com









HONG KONG ADDRESS

Room# 1804, The L Plaza, 367-375, Queen's Road, Central Hong Kong. Tel: +852 31758750, Fax: +852 31758751